

BID AND AWARD COMMITTEE

Bid Bulletin No.1

This Bid Bulletin is issued to amend/clarify items in the Bidding Documents for the **SUPPLY AND DELIVERY OF VARIOUS MATERIALS FOR THE 16TH FLOOR RENOVATION (Phase 2)**, Public Bidding No. 2024-027.

Reference			Amendment/s		
Section VII. Technical Specifications <i>Lot 1: Walls</i> <i>page 30-32</i>			Section VII. Technical Specifications <i>Lot 1: Walls</i> <i>page 30-32</i>		
Description	Qty.	Unit	Description	Qty.	Unit
1. Laminate Board L122cm x W280.50cm x Thickness 0.5cm (Environmental Protect Grade/Fire Rating/Waterproof/Bendable) Wood Plastic Composite Wall Panel Color: Copper	274	pcs	1. Laminate Board L122cm x W280.50cm x Thickness 0.5cm Finish : Semi-Gloss Metallic Design: Horizontal Embossed Refined Multiple Lines Color: Metallic Copper Single Face (Environmental Protect Grade/Fire Rating/Waterproof/Bendable) Wood Plastic Composite Wall Panel	274	pcs
2. Laminate Board L122cm x W280.50cm x Thickness 0.5cm (Environmental Protect Grade/Fire Rating/Waterproof/Bendable) Wood Plastic Composite Wall Panel Color: Dark Gray	194	pcs	2. Laminated Board L122cm x W280.50cm x Thickness 0.5cm Finish: Semi-Gloss Metallic Design: Horizontal Embossed Refined Multiple Lines Color: Metallic Dark Gray Single Face (Environmental Protect Grade/Fire Rating/Waterproof/Bendable) Wood Plastic Composite Wall Panel	194	pcs
3. Laminate Board L122cm x W280.50cm x Thickness 0.5cm (Environmental Protect Grade/Fire Rating/Waterproof/Bendable) Wood Plastic Composite Wall Panel Color: Beige	349	pcs	3. Laminated Board L122cm x W280.50cm x Thickness 0.5cm Single Face Finish/Design: Surface pattern that emulates the look and feel of elegant linen Color: Beige (Environmental Protect Grade/Fire Rating/Waterproof/Bendable) Wood Plastic Composite Wall Panel	349	pcs
4. Laminate Board L122cm x W280.50cm x Thickness 0.5cm (Environmental Protect Grade/Fire Rating/Waterproof/Bendable) Wood Plastic Composite Wall Panel Color: Beige	63	pcs	4. Laminated Board L122cm x W280.50cm x Thickness 0.5cm Finish/Design: Surface pattern that emulates the look and feel of elegant linen Color: Dark Beige Single Face (Environmental Protect Grade/Fire Rating/Waterproof/Bendable) Wood Plastic Composite Wall Panel	63	pcs
5. Laminated Board L122cm x W280.50cm x Thickness 0.5cm (Environmental Protect Grade/Fire Rating/Waterproof/Bendable) Wood Plastic Composite Wall Panel Color: Dark Gray	60	pcs			
6. Wood Plastic Composite Fluted Wall Panels, 3000mm x 160mm x 20mm Color: Copper	200	pcs			

7. WPC Corner L-Strip 2900mm x 30mm x 30mm (For Fluted Panels), Color: Copper	60	pcs
8. Laminate Sheet 2440mm x 1220mm x 1mm thk Color: Gray Finish: Glossy	36	pcs

Rating/Waterproof/Bendable) Wood Plastic Composite Wall Panel		
5. Laminated Board L122cm x W280.50cm x Thickness 0.5cm Finish: Metallic Matte Finish Design and Color: Solid Metallic Dark Gray Single Face (Environmental Protect Grade/Fire Rating/Waterproof/Bendable) Wood Plastic Composite Wall Panel	60	pcs
6. Wood Plastic Composite Fluted Wall Panels, 3000mm x 160mm x 20mm Finish: Metallic Semi-Gloss Design: Fluted Concave with embossed refined multiple lines Color: Metallic Copper	200	pcs
7. WPC Corner L-Strip 2900mm x 30mm x 30mm (For Fluted Panels), Color: Copper Finish: Metallic Matte Finish	150	pcs
8. Laminate Sheet 2440mm x 1220mm x 1mm thk Color: Gray Finish: Matte	36	pcs

Section VII. Technical Specifications
LOT 5: Operable Wall System
Page 40

Description	Qty.	Unit
1. Operable Wall System Dimension: H2900mm x 89mm thick, 1.23m standard width Panel Trim: Aluminum - w/pvc sound seals Satin Anodized Finish Panel Core: 80kg/m3 high density Rockwool Insulation - 50mm thick Sound Seals: Retractable top and bottom Track and Rollers: Aluminum Track and Polymer Trolley System Track Support: 1.20m from track to bottom of beam (above 1.2m by others) Sound Barrier: Gypsum board barrier to meet 48 STC (Sound Rating Telescopic Panel) Closure Panel type: Telescopic panel Sound Rating: 48 STC - Estimated ASTM E557) Wall Finish: Bare Finish Quantity: 3 Sets Set 1 and Set 2: Dimension 10150mm x 2900mm (2 Runs)	1	lot

Section VII. Technical Specifications
LOT 5: Operable Wall System
Page 40

Description	Qty.	Unit
1. Operable Wall System Dimension: H2900mm x 89mm thick, 1.23m standard width Panel Trim: Aluminum - w/pvc sound seals Satin Anodized Finish Panel Core: 80kg/m3 high density Rockwool Insulation - 50mm thick Sound Seals: Retractable top and bottom Track and Rollers: Aluminum Track and Polymer Trolley System Track Support: 1.20m from track to bottom of beam (above 1.2m by others) Sound Barrier: Gypsum board barrier to meet 48 STC (Sound Rating Telescopic Panel) Closure Panel type: Telescopic panel Sound Rating: 48 STC - Estimated ASTM E557) Wall Finish: Bare Finish Quantity: 3 Sets Color: Gray Set 1 and Set 2: Dimension 10150mm x 2900mm (2 Runs) Set 3: Dimension: 10600mm x 2900mm (1 Run)	1	lot

Set 3: Dimension: 10600mm x 2900mm (1 Run)			
<p>Section VII. Technical Specifications <i>Lots 1 to 6</i> <i>pages 30-41</i></p> <p>Product Sample:</p> <p>The winning bidder must show a product sample (if required), subject to the approval of the end-user/HTC.</p>	<p>Section VII. Technical Specifications <i>Lots 1 to 6</i> <i>pages 30-41</i></p> <p>Product Sample:</p> <p>Prospective bidder/s may inspect the available actual sample/s in the SEC Headquarters from 04-09 July 2024 from 8:00am to 5:00pm. You may coordinate with the BAC Secretariat through the contact details indicated in the Invitation to Bid.</p> <p>The bidder with the lowest/single calculated bid is required to submit a sample within Three (3) calendar days from notice.</p>		

Attached are the revised Technical Specifications




Reference	Clarification/s
Section III. Bid Data Sheet <i>ITB Clause 5.3</i> <i>page 30</i>	<p><i>Question:</i></p> <p>Can the <u>construction tools</u> be considered as "similar supplies"?</p> <p><i>Answer:</i></p> <p>No, because the similar supplies being contemplated under this clause are finishing materials and supplies.</p>
Section VII. Technical Specifications <i>Lot 1: Walls, Items 1-5</i> <i>page 30</i>	<p><i>Question:</i></p> <p>What kind of Laminated Board is required? Single-face laminated or double-face laminated?</p> <p><i>Answer:</i></p> <p>Single-face laminated board.</p>

Provision in the bidding documents that are in conflict with this Bulletin are deemed revised/amended. For guidance and information of all concerned.


Issued this 3rd day of July 2024

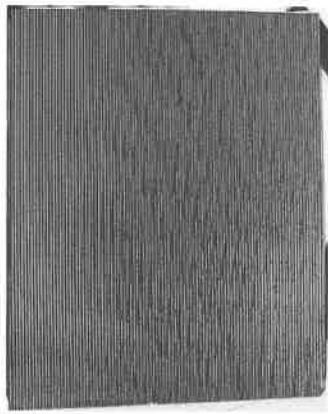

For the Bids and Awards Committee:





ARMANDO A. PAN, JR.
 Chairman
/itj

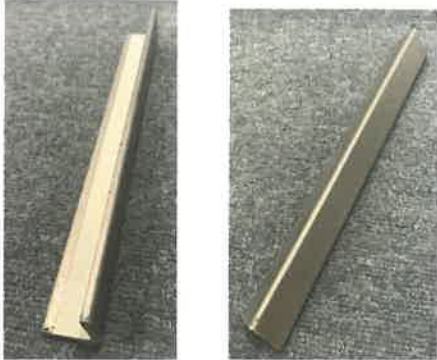

Technical Specifications

Bidders must state here either "Comply" or any equivalent term in the column "Statement of Compliance"

Lot 1: Walls			
Item	Specification	Qty	Statement of Compliance
1	<p>Laminate Board L122cm x W280.50cm x Thickness 0.5cm Finish: Semi-Gloss Metallic Design: Horizontal Embossed Refined Multiple Lines Color: Metallic Copper Single Face (Environmental Protect Grade/ Fire Rating/ Waterproof/ Bendable) Wood Plastic Composite Wall Panel Color: Copper</p> 	274 pcs	
2	<p>Laminate Board L122cm x W280.50cm x Thickness 0.5cm Finish: Semi-Gloss Metallic Design: Horizontal Embossed Refined Multiple Lines Color: Metallic Dark Gray Single Face (Environmental Protect Grade/Fire Rating/Waterproof/Bendable) Wood Plastic Composite Wall Panel Color: Dark Gray</p>	194 pcs	

			
3	<p>Laminate Board L122cm x W280.50cm x Thickness 0.5cm Single Face Finish/Design: Surface pattern that emulates the look and feel of elegant linen (Environmental Protect Grade/Fire Rating/Waterproof/Bendable) Wood Plastic Composite Wall Panel Color: Beige</p> 	349 pcs	
4	<p>Laminate Board L122cm x W280.50cm x Thickness 0.5cm Finish/Design: Surface pattern that emulates the look and feel of elegant linen Color: Dark Beige Single Face (Environmental Protect Grade/Fire Rating/Waterproof/Bendable) Wood Plastic Composite Wall Panel Color: Beige</p>	63 pcs	

			
5	<p>Laminate Board L122cm x W280.50cm x Thickness 0.5cm Finish: Metallic Matte Finish Design and Color: Solid Metallic Dark Gray Single Face (Environmental Protect Grade/Fire Rating/Waterproof/Bendable) Wood Plastic Composite Wall Panel Color: Dark Gray</p> 	60 pcs	
6	<p>Wood Plastic Composite Fluted Wall Panels 3000mm x 160mm x 20mm, Finish: Metallic Semi-Gloss Design: Fluted Concave with embossed refined multiple lines, Color: Metallic Copper</p> 	200 pcs	



7	<p>WPC Corner L-Strip 2900mm x 30mm x 30mm (For Fluted Panels), Color: Copper Finish: Metallic Matte Finish</p> 	150 pcs	
8	<p>Laminate Sheet 2440mm x 1220mm x 1mm thk Color: Gray/Finish: Matte</p> 	36 pcs	
9	<p>Brass J Channel Trim 3000mm x 20mm x 6.5mm (Color: Champagne)</p>	3000 pcs	
10	<p>Brass H Channel Trim 3000mm x 5mm x 5mm (Color: Champagne)</p>	3000 pcs	
11	<p>L Shape Brass 3050mm x 20mm x 20mm (Color: Champagne)</p>	400 pcs	
12	<p>Wood Plastic Composite Indoor Columns 2900mm x 50mm x 50mm (Color: Cedar)</p>	200 pcs	
<p><i>Product Sample</i> Prospective bidder/s may inspect the available actual sample/s in the SEC Headquarters from 04-09 July 2024 from 8:00am to 5:00pm. Coordinate with the BAC Secretariat through the contact details in the Invitation to Bid.</p> <p>The bidder with the lowest/single calculated bid is required to submit a sample within Three (3) calendar days from notice.</p>			


	<p><i>Warranty</i> All moving items/parts with mechanism failure, defective construction, faulty joints and springs must be covered by a full parts and labor warranty and/or replacement warranty for one (1) year from the date of delivery and installation.</p>	
--	--	--

I hereby certify that the statement of compliance to the foregoing technical specifications are true and correct otherwise, if found to be false either during bid evaluation, post-qualification or the execution of the contract, the same shall give rise to the imposition of administrative sanctions and the forfeiture of bid security or the performance security posted consistent with section 69.1 and 69.2 of the revised Implementing Rules and Regulations of the Republic Act No. 9184.

AUTHORIZED REPRESENTATIVE:

Signature : _____
Company Name : _____
Printed Name : _____
Position : _____
Date : _____

Lot 2: Floor Finishes and Tiles			
Item	Specification	Qty	Statement of Compliance
1	Wall to Wall Carpet Fiber: Strudin BCF PP Construction: Level Loop DYW Method: Solution Dyed Pile Height: 5.5mm Pile Weight: 26oz. Primary Backing: Woven Polypropylene Secondary Backing: Action Back Width: 3.98 meters Length: 35 meters Color: Carbon 	13 rolls	
2	Wood Grippers 48" x 1", 1/4" thk (100 pcs. /box)	7 boxes	
3	Shoe Tacks 1/2" (100 pcs. /box)	274 boxes	
4	Foam Carpet Underlay 5' x 6' x 3/8" thk	614 pcs	
5	Porcelain Floor Tiles (polished) 60 cm x 120 cm White Marble 	161 pcs	

6	Porcelain Floor Tiles (non-skid) 60cm x 120cm Black Marble 	34 pcs	
<p><i>Product Sample</i> Prospective bidder/s may inspect the available actual sample/s in the SEC Headquarters from 04-09 July 2024 from 8:00am to 5:00pm. Coordinate with the BAC Secretariat through the contact details in the Invitation to Bid.</p> <p>The bidder with the lowest/single calculated bid is required to submit a sample within Three (3) calendar days from notice.</p>			
<p><i>Warranty</i> All moving items/parts with mechanism failure, defective construction, faulty joints and springs must be covered by a full parts and labor warranty and/or replacement warranty for one (1) year from the date of delivery and installation.</p>			

I hereby certify that the statement of compliance to the foregoing technical specifications are true and correct otherwise, if found to be false either during bid evaluation, post-qualification or the execution of the contract, the same shall give rise to the imposition of administrative sanctions and the forfeiture of bid security or the performance security posted consistent with section 69.1 and 69.2 of the revised Implementing Rules and Regulations of the Republic Act No. 9184.

AUTHORIZED REPRESENTATIVE:

Signature : _____
 Company Name : _____
 Printed Name : _____
 Position : _____
 Date : _____

Lot 3: Lightning Works			
Item	Specification	Qty	Statement of Compliance
1	LED Strip Light (Color Temp.: Warm White) (Voltage: 24V) (Wattage: 14.4w/m) (Beam Angle: 120 degree) (CRI:>80) (Dimension: 5000mm x 10mm x 2.3mm) (IP Ratings: IP65) (Output Current: 6/3A (60mA per unit) (Temp. Color: 2600-2900K) 300 LED, 5050, 72 Watts per roll (14.4 watts per meter) (Length: 5 meters per roll)	24 rolls	
2	Strip Light Power Supply (Wattage: 200W) (Output Voltage: 24VDC) (Output Current: 0~14.64Amp) (Subcategory: AC-DC Power Supply) (IP Rating: IP20) (Dimension: L215mm x W155mm x H30mm)	16 pcs	
3	Host Downlight, 92A LED 1x1500LM 15W, 24D reflector (complete with Tridonic adv non-dim driver 350mA+CREE chip, CXA-1512 CRI90, 3000K), (Full White) (: 202.0415.0233 BYQ-ATCO 10.5-14.7W 30-42V 350MA LED) (102.060115.0010 GY-KR 3000K 900-1019M LED Ra90)	412 pcs	
<p><i>Product Sample</i> Prospective bidder/s may inspect the available actual sample/s in the SEC Headquarters from 04-09 July 2024 from 8:00am to 5:00pm. Coordinate with the BAC Secretariat through the contact details in the Invitation to Bid.</p> <p>The bidder with the lowest/single calculated bid is required to submit a sample within Three (3) calendar days from notice.</p>			
<p><i>Warranty</i> All moving items/parts with mechanism failure, defective construction, faulty joints and springs must be covered by a full parts and labor warranty and/or replacement warranty for one (1) year from the date of delivery and installation.</p>			

I hereby certify that the statement of compliance to the foregoing technical specifications are true and correct otherwise, if found to be false either during bid evaluation, post-qualification or the execution of the contract, the same shall give rise to the imposition of administrative sanctions and the forfeiture of bid security or the performance security posted consistent with section 69.1 and 69.2 of the revised Implementing Rules and Regulations of the Republic Act No. 9184.

AUTHORIZED REPRESENTATIVE:

Signature : _____
Company Name : _____
Printed Name : _____
Position : _____
Date : _____

Lot 4: Doors, Windows and Accessories			
Item	Specification	Qty	Statement of Compliance
1	Glass Double Swing Door 1000 mm x 2400 mm, 12mm thk, Frameless tempered Glass Door	5 sets	
2	Shower Enclosure: 1200 mm x 2400 mm (Frameless Glass: 10mm Tempered Glass)	1 pc	
3	Shower Enclosure: 750 mm x 2400 mm (Frameless Glass: 10mm Tempered Glass)	2 pcs	
4	Glass Shower Door: 600 mm x 2400 mm (Frameless Glass: 10mm Tempered Glass)	2 sets	
5	Door Handle: (Dimension: 900mm, 32mmØ) (Material: Stainless Steel) (Finish: Polished Stainless Steel)	2 sets	
6	Glass Shower Hinge (Load Capacity: 50kg.)(Material: Stainless Steel)(Finish: Polished Stainless Steel)	8 sets	
7	Frameless Glass 2400 mm x 900mm 10mm thk; Tempered Glass	1 pc	
8	Bevelled Facial Glass 24" x 48" x 1" thk	2 sets	
9	Plastic Profile 2000mm x 10mm (inner width) x 10mm (height), 1mm thk	6 pcs	
10	2 Cup Glass Holder, 70kg max weight	8 pcs	
11	Wooden Swing Door 900mm x 2400mm with Door Jamb Tanguile kiln dried, 2inches thk x 5 inches width	6 sets	
12	Wooden Swing Door 900mm x 2100mm with Door Jamb Tanguile kiln dried, 2inches thk x 5 inches width	2 sets	
13	Wooden Swing Door 800mm x 2100mm with Door Jamb Tanguile kiln dried, 2inches thk x 5 inches width	2 sets	
14	Door Handle, Stainless Steel Round H-handle 32mm Ø x1200mm chrome door pull	10 sets	
15	Entrance Lever Lock, Heavy Duty (Material: Stainless Steel) (Finish: Satin Nickel Finish)	8 sets	

16	Dead Bolt Lock, Stainless Steel finish, heavy duty, Double Cylinder Lock backset 60mm, Door thickness 45mm	13 sets	
17	Butterfly Hinges 3.5" x 3.5", Material: Stainless Steel, Heavy Duty	50 pairs	
18	Top patch (Material: Stainless Steel) (Glass Thickness 10-12mm)	10 pcs	
19	Bottom Patch (Material: Stainless Steel) (Glass Thickness: 10-12mm)	10 pcs	
20	Corner Patch lock (Material: Stainless Steel) (Glass Thickness: 10-12mm)	10 pairs	
21	Top Pivot Plate (Material: Stainless Steel) (Dimension: 105 x 28mm)	10 pcs	
22	Double Cylinder Floor Spring Hinge (Variable Power Size: EN2-EN4) (Adjustable Closing Speed: 90 degrees -25degrees) (Adjustable Latching Speed: 25 degrees-0 degrees) (Maximum Door Width: 950mm) (Maximum Door Weight: 100kg.) (Opening Angle: 130 degrees) (Hold Open: 105 degrees and 90 degrees)	10 pcs	
23	Window Blinds 60 1/4" x 95" per panel (Material: Wood) (Finish: Mahogany)	16 sets	
	<p><i>Product Sample</i> Prospective bidder/s may inspect the available actual sample/s in the SEC Headquarters from 04-09 July 2024 from 8:00am to 5:00pm. Coordinate with the BAC Secretariat through the contact details in the Invitation to Bid.</p> <p>The bidder with the lowest/single calculated bid is required to submit a sample within Three (3) calendar days from notice.</p>		
	<p><i>Warranty</i> All moving items/parts with mechanism failure, defective construction, faulty joints and springs must be covered by a full parts and labor warranty and/or replacement warranty for one (1) year from the date of delivery and installation.</p>		

I hereby certify that the statement of compliance to the foregoing technical specifications are true and correct otherwise, if found to be false either during bid evaluation, post-qualification or the execution of the contract, the same shall give rise to the imposition of administrative sanctions and the forfeiture of bid security or the performance security posted consistent with section 69.1 and 69.2 of the revised Implementing Rules and Regulations of the Republic Act No. 9184.

AUTHORIZED REPRESENTATIVE:

Signature	:	_____
Company Name	:	_____
Printed Name	:	_____
Position	:	_____
Date	:	_____

Lot 5: Operable Wall System			
Item	Specification	Qty	Statement of Compliance
1	<p>Operable Wall System (Dimension: H2900mm x 89mm thick, 1.23m standard width (Special Sizes available) (Panel Trim: Aluminum - w/pvc sound seals (Satin Anodized Finish)(Panel Core: 80kg/m3 high density Rockwool Insulation - 50mm thick) (Sound Seals: Retractable top and bottom) (Track and Rollers: Aluminum Track and Polymer Trolley System)(Track Support: 1.20m from track to bottom of beam (above 1.2m by others)(Sound Barrier: Gypsum board barrier to meet 48 STC (Sound Rating Telescopic Panel) (Closure Panel type: Telescopic panel)(Sound Rating: 48 STC - Estimated ASTM E557) (Wall Finish: Bare Finish) (Quantity: 3 Sets), Color: Gray</p> <p>Set 1 and Set 2: Dimension 10150mm x 2900mm (2 Runs)</p> <p>Set 3: Dimension: 10600mm x 2900mm (1 Run)</p>	1 lot	
	<p><i>Product Sample</i> Prospective bidder/s may inspect the available actual sample/s in the SEC Headquarters from 04-09 July 2024 from 8:00am to 5:00pm. Coordinate with the BAC Secretariat through the contact details in the Invitation to Bid.</p> <p>The bidder with the lowest/single calculated bid is required to submit a sample within Three (3) calendar days from notice.</p>		
	<p><i>Warranty</i> All moving items/parts with mechanism failure, defective construction, faulty joints and springs must be covered by a full parts and labor warranty and/or replacement warranty for one (1) year from the date of delivery and installation.</p>		

I hereby certify that the statement of compliance to the foregoing technical specifications are true and correct otherwise, if found to be false either during bid evaluation, post-qualification or the execution of the contract, the same shall give rise to the imposition of administrative sanctions and the forfeiture of bid security or the performance security posted consistent with section 69.1 and 69.2 of the revised Implementing Rules and Regulations of the Republic Act No. 9184.

AUTHORIZED REPRESENTATIVE:

Signature : _____
Company Name : _____

Printed Name

:

Position

:

Date

:

Lot 6: Heating, Ventilation, Air Conditioning System			
Item	Specification	Qty	Statement of Compliance
1	Exhaust Fan (Ceiling Mounted) Voltage: 220V, Power: 25W, Panel Size: 200mm x 200mm Hole Size: 160mm x 160mm	4 sets	
2	Flexible Duct Hose: Aluminum Foil ventilation duct hose 6" x 10 meters	8 boxes	
3	Duct Tape: Heavy Duty; Silver; 48mm x 54.80 meters	4 pcs	
4	Emergency Light: LED emergency light twin head, Color: White, Dimension: 330mm x 146mm	14 sets	
5	Ground-Fault Circuit Interrupter Outlets (20A-250 V) Dimension: 119mm x 75mm, Ivory plate, 2gang GFCI safety outlet wide series plate 20A-250V	4 sets	
6	Plain G.I. Sheet Gauge 22, 4' x 8'	8 sheets	
7	Plain G.I. Sheet Gauge 24, 4' x 8'	40 sheets	
8	Plain G.I. Sheet Gauge 26, 4' x 8'	36 sheets	
9	Polyolefin Insulation 1.2meters x 20 meters, 1/2" thk	14 rolls	
10	Duct Tape 3" x 45 meters	40 pcs	
11	Flexible Duct Hose 250mmØ x 10 meters	3 boxes	
12	Full Threaded Rod 3/8" Ø x 3 meters	160 pcs	
13	Grip Anchor 3/8" Ø x 1 1/2" length	9 boxes	
14	Nut 3/8" Ø x 1/4" thk	200 pcs	
15	Duct Sealant (Fire Proof) (4L)	3 gals.	
16	Linear Air Grille 2000mm x 100mm, 2 slots	45 pcs	
17	Return Air Grille 3000mm x 150mm, 3 slots	9 pcs	
18	Angle Bar 6 meters x 1 1/2", 3/16" thk	10 pcs	
19	B.I. Pipe (Standard) Sch. 40, 6 meters x 1"Ø	14 pcs	
20	B.I. Elbow 1"Ø (Standard, 90 degrees)	150 pcs	

21	B.I. Tee 1"Ø (Standard)	45 pcs	
22	B.I. Coupling Red 1" x 1/2"Ø	100 pcs	
23	Sprinkler Pendant Head, Red 1/2"Ø	100 pcs	
24	Loop Hanger 1"	80 pcs	
25	Red Oxide Metal Primer, 1 liter	4 liters	
26	International Red Oxide Metal Primer, 1 liter	4 liters	
27	Paint Brush 2"	3 pcs	
28	Paint Thinner (350 ml)	3 bottles	
<p><i>Product Sample</i> Prospective bidder/s may inspect the available actual sample/s in the SEC Headquarters from 04-09 July 2024 from 8:00am to 5:00pm. Coordinate with the BAC Secretariat through the contact details in the Invitation to Bid.</p> <p>The bidder with the lowest/single calculated bid is required to submit a sample within Three (3) calendar days from notice.</p>			
<p><i>Warranty</i> All moving items/parts with mechanism failure, defective construction, faulty joints and springs must be covered by a full parts and labor warranty and/or replacement warranty for one (1) year from the date of delivery and installation.</p>			

I hereby certify that the statement of compliance to the foregoing technical specifications are true and correct otherwise, if found to be false either during bid evaluation, post-qualification or the execution of the contract, the same shall give rise to the imposition of administrative sanctions and the forfeiture of bid security or the performance security posted consistent with section 69.1 and 69.2 of the revised Implementing Rules and Regulations of the Republic Act No. 9184.

AUTHORIZED REPRESENTATIVE:

Signature : _____

Company Name : _____

Printed Name : _____

Position : _____

Date : _____